


ALKALINE-MANGANESE DIOXIDE BATTERY



Size: C (LR14) PX1400



Dimensions shown are IEC standards

KEY FEATURES

- Reliable Performance
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environmental standards:
 - o Safety: IEC 60086-5
 - o ANSI C 18.1M, Part-2
 - o EU Battery Directive
 - Quality: ISO 14001 and 9001, Duracell World Class Continuous Improvement Program

TYPICAL APPLICATIONS

- Sanitizer Dispensers
- Automatic Odorizers
- Paper Towel Dispensers
- Flashlights
- Medical Devices

ELECTRICAL CHARACTERISTICS

•	Nominal capacity (50 mA Cont., .8V cut-off)	7,933 mAh
---	---	-----------

- Typical Voltage (at + 20 °C)
 1.5 V
- AC Impedance @ 1kHz
 150 mΩ

PHYSICAL CHARACTERISTICS

•	Typical weight	70.0 g (2.5 oz)
•	Typical volume	26.9 cm3 (1.6 in3)
•	Terminals	Flat

OPERATING & STORAGE CONDITIONS

•	Operating temperature range	-20°C to 54°C (-4°F to 130°F)
•	Recommended Storage (storage area should be clean, cool, dry and ventilated)	5°C to 30°C (41°F to 86° F)

TO ORDER OR LEARN MORE, PLEASE CONTACT:


Sales@psapower.com
www.psapower.com


Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


This data is subject to change. Performance information is typical. Contact Duracell for the latest information.

PROCELL® PROFESSIONAL BATTERIES

TYPICAL PERFORMANCE



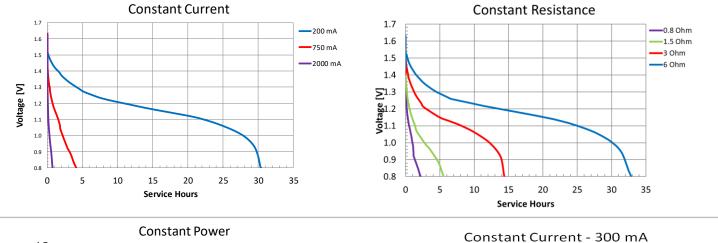

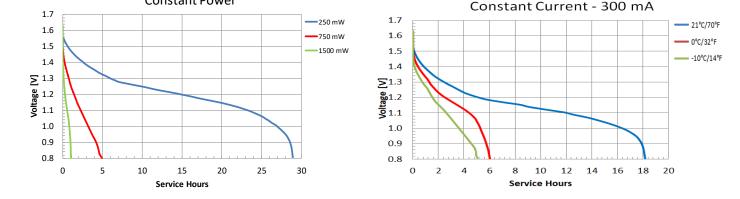

TO ORDER OR LEARN MORE, PLEASE CONTACT:

Sales@psapower.com
www.psapower.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Duracell for the latest information.